


100 DWI

Water injection choke for enhanced oil recovery

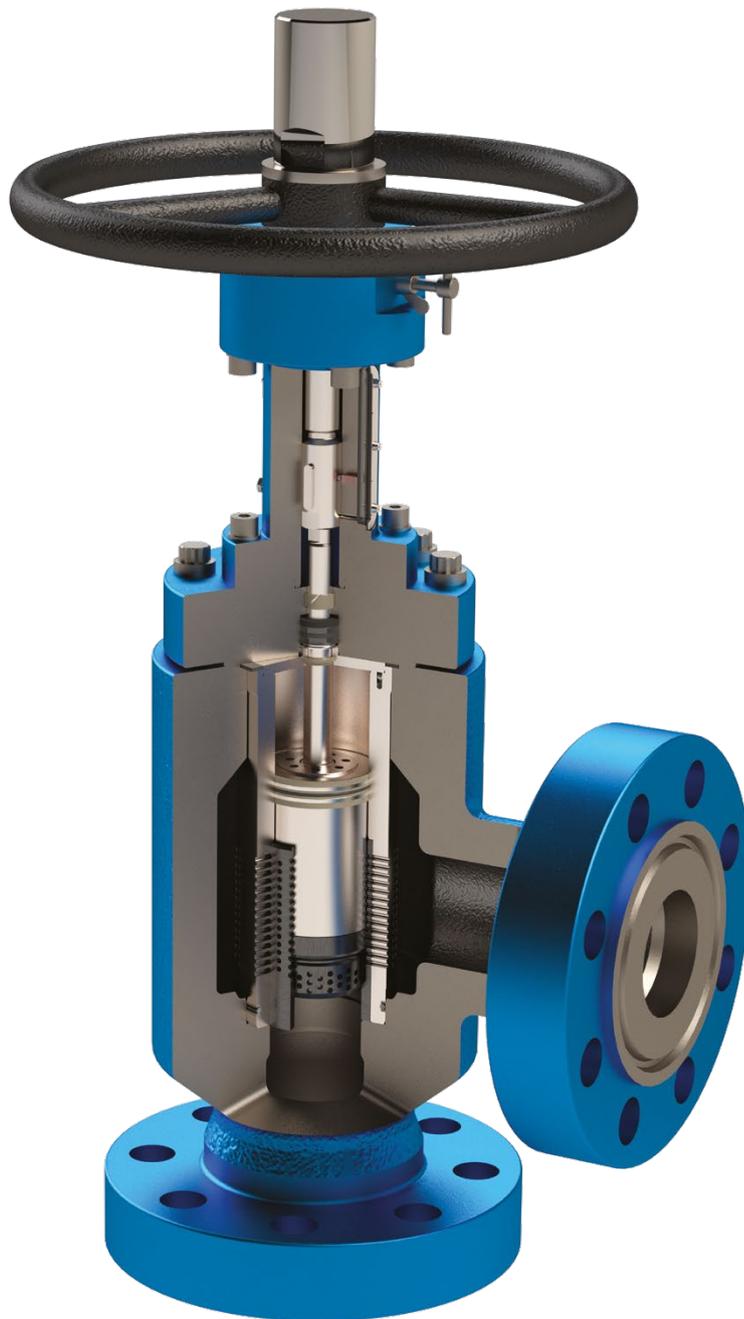

- Compact
- Reliable
- Cost-effective
- Versatile

100 DWI

Water injection choke for enhanced oil recovery



Water-flooding or water injection is applied to increase pressure and thereby stimulate production in oil fields. The water injection valve is located at the injection site and is responsible for controlling the injection flow and pressure.

The primary value of the 100DWI is the greatly increased valve service life thanks to our enhanced cavitation and erosion control mechanisms.


Our two technology options are:

- Advanced cavitation control – A cost effective single - or multi stage cage trim (metal, tungsten carbide or Stellite™ + metal), anti-cavitation choke valve range. This solution is predominantly for clean water applications and for low pressure differentials in general (~200-250 bar).
- Multi-stage/multi-path anti-cav solution - Our well known and field proven premium trim design, ensures velocity and erosion control in a tungsten carbide trim. The technology is further optimised for cavitation service, designed for dirty water and/or high severity applications.

These solutions build on our already existing high-quality technology offering but have been engineered to bring that same excellence to the water injection application.

Product features

- Increase valve service life by up to 100%
- Increase controllability by up to 50%
- Reduce end-user overall lifecycle costs by an estimated 40% (not including loss of production)
- Integral yoke design, no exposed stem
- Ease of maintenance due to minimum amount of parts
- Additional pressure reduction stages at small opening for long-lasting startup conditions

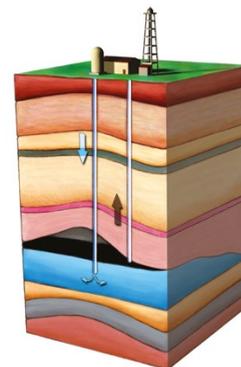

Product specification

Connections (larger sizes on request)

1.5" to 6"

Design temperature

-29°C to 121°C

Shut-off class

Up to class V

Quality

3.1 material cert standard
3.2 material cert optional

Noise prediction

ISA S75.17; IEC 534-8-3

Design codes

API 6A
ISO 10423
ASME B16.34

Certifications

PR2, NACE, fugitive emission optional, fire safe by design

Optional special testing

Capacity, fugitive emissions

Pressure ratings

Up to ASME 1500 or API 5000

100 DWI Water injection choke for enhanced oil recovery

Damage mechanisms

The severity of the conditions water injection chokes have to handle are typically driven by three contributing factors, varying in their importance and based on your application:

1. Severe corrosion risk
2. High potential for cavitation erosion due to a high pressure drop in combination with a low downstream pressure during start-up
3. High potential for particle erosion especially in case of produced water with higher sand content


IMI CCI addresses these damage mechanisms in the 100DWI water injection chokes with superior material selection and multistage technology to reduce fluid velocities within the choke trim. A flow path specifically designed to minimise cavitation damage has been developed to tackle the main influencing factors of cavitation damage and intensity as well as fluid velocity. With that we are able to offer high protection against material loss on the main control and seating elements caused by cavitation erosion. CFD flow simulations and physical laboratory tests validate the enhanced cavitation control. The appropriate configuration for your operational demands will be selected to maximise the durability of the valve.

Cavitation

Cavitation phenomena occur when the local pressure in the liquid changes rapidly. If it decays below the vapor pressure of the fluid, steam filled cavities are formed.

These bubbles are transported with the flow and collapse once they reach an area of higher pressure. Collapsing bubbles form a jet which leads to wearing of the material if the void implodes close to a metal surface.

Additionally to the multistage technology, a special pressure reduction stage in the plug in IMI CCI's 100DWI product line is provided in the most cavitation resistant materials available to maximize the lifetime of the choke trims.

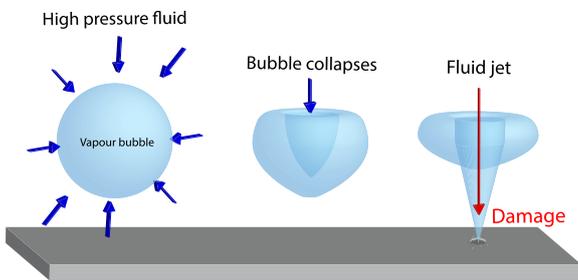


Cavitation erosion

Particle Erosion

Particles carried with the high velocity fluid stream can erode the trim and lead to the reduced life time of water injection chokes. The severity of particle erosion is dependant upon the nature of the particles, the fluid velocities, the material hardness and the impact direction.


Additionally to the multistage technology which is reducing the fluid velocities within the trim, IMI CCI's 100DWI is minimising erosion damage by providing very hard trim material options developed to handle as much sand as experienced in production chokes.

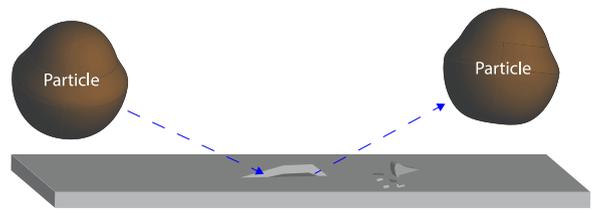

Particle erosion

Material volume loss test

The material volume loss (red colour in the diagram) was determined in artificial seawater on the basis of ASTM G32 method for cavitation erosion and then related to the literature value of 316 SS. It's clearly visible that the materials listed are performing better than 316 SS. There are also differences in tungsten carbide grades, where the IMI CCI chosen grade performs in cavitating environments about five times better than standard 10%Co binder tungsten carbide at similar hardness values (blue colour in the diagram). The relative hardness of the material is important, as it influences the rate of erosion due to impact of hard and abrasive particles.

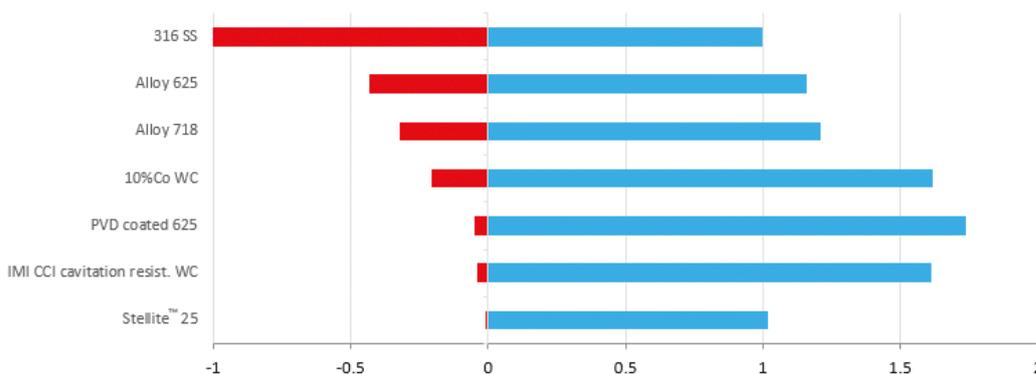



Standard ISO flange allows for flexibility in actuator selection.


Fully closed yoke with integrated stroke indicator - stem not exposed to environment.

Fire safe design for packing and main seal.

Elastomeric seals (API certified) used for ease of handling.

Minimum number of components for ease of maintenance.


Valve body is available with and without cladding.



The additional shroud on the plug acts as an **additional pressure reduction stage** at low valve openings, and reduces the differential pressure taken by the cage. This is crucial for low back pressure conditions.

The shroud also provides a protection function for the seat area to guarantee tightness over a long life time.

Trim available in tungsten carbide (with protective sleeve) and metal configuration.

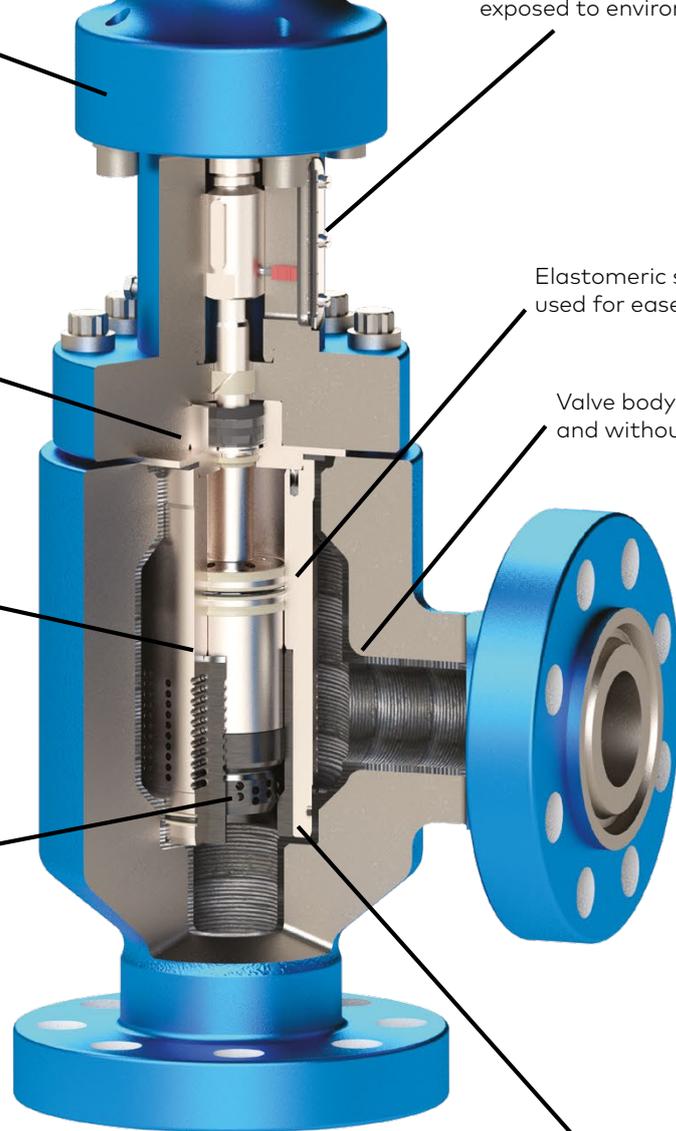

Sizing and material selection

Materials					
Body	Castings: ASTM A487 Gr.4C / ASTM A352 LCB / A995 4A (duplex) Forgings: AISI 4130 / ASTM A182 F51 (duplex) / A182 F22			<i>With and without cladding (Ni Alloy N06625)</i>	
Bonnet (forged)	AISI 4130 / ASTM A182 F22 A182 F51 (duplex)				
Trim	Ni alloy N06625 + Stellite™ / 17-4PH + Stellite™ / F51 + Stellite™ / Solid Tungsten Carbide			<i>Stem surface PVD-coated</i>	
Actuator	Handwheel (travel stop optional), electric			<i>Integrated stroke indicator</i>	
Sizing					
Plug size (in)	1.25	1.75	2.5	3.25	4
Connections (in)	1.5, 2, 3, 4	2, 3, 4	3, 4, 6	4, 6	6
Target Valve Cv*	18	33.5	75.7	140.4	222

* Valve Cv values can be adapted to the particular requirements of the application

Americas

imiccisales.americas@imi-critical.com

IMI CCI Brazil
Tel: +55 11 2691 3361

IMI CCI Houston
Tel: +1 832 467 7200

IMI CCI RSM
Tel: +1 949 858 1877

Asia-Pacific

imiccisales.apac@imi-critical.com

IMI Critical Australia
Tel: +61 3 9213 0800

IMI Critical Japan
Tel: +81 78 322 1220

IMI Critical Korea
Tel: +82 31 980 9800

IMI Critical Malaysia
Tel: +60 3 6412 3500

IMI Critical Singapore
Tel: +65 6653 7000

Greater China

imiccisales.china@imi-critical.com

IMI Critical Greater China
Tel: +86 21 3973 8000

Europe

imiccisales.europe@imi-critical.com

IMI CCI Austria
Tel: +43 1 869 27 40

IMI CCI Brno
Tel: +420 511 188 288

IMI CCI Italy
Tel: +39 02 4345 8611

IMI CCI Sweden
Tel: +46 533 689 600

IMI CCI Switzerland
Tel: +41 52 264 9500

IMI CCI United Kingdom
Tel: +44 (0)161 655 1680

IMI Truflo Italy
Tel: +39 0523 766111

India

imiccisales.india@imi-critical.com

IMI CCI Bangalore
Tel: +91 80 4030 3500

IMI CCI SriCity
Tel: +91 85 7639 8000

Middle East and Africa

imiccisales.mea@imi-critical.com

IMI Critical MEA
Tel: +971 4 807 3111

IMI CCI South Africa
Tel: +27 13 697 3305

Other

imicci.sales@imi-critical.com

IMI Critical Engineering

Lakeside, Solihull Parkway
Birmingham Business Park
Birmingham B37 7XZ
United Kingdom

Tel: +44 (0)121 717 3700
Fax: +44 (0)121 717 3701

www.imi-critical.com

01072a.01-20en

Stellite™ is a registered trademark of Kennametal Inc.