

DT DigitalTrak




Engineering
GREAT Solutions

Loop powered, compact positioner

DT DigitalTrak

The DigitalTrack positioner is a loop powered instrument.

As a control part of the pneumatic valve set, this positioner is widely used in petroleum, chemical, electric generation, metal production, light industry and other fields of automation systems.

The DT intelligent electro-pneumatic valve positioner accepts 4-20 mA valve setting signal from the control system; at the same time, it receives the actual valve signal through the local sensors; the two signals are compared by control software in order to control the feeding and exhaust of the air to the actuator, driving the valve to reach the set point.

The DigitalTrack positioner is based on microprocessor technology. It can overcome friction and the imbalance power on the control valve well, and improve the response speed of the control valve. This sets the position rapidly and accurately.



High reliability

Key features and benefits

- > Compact design
- > Metallic case
- > Heavy duty design
- > High reliability
- > Integrated fail in place on loss of signal device
- > Integrated position transmitter
- > Display for calibration
- > Autotuning system for calibration
- > Auto-diagnosis system
- > Suitable for:
 - Standard, sandstorm, copper free ambient conditions
 - Single and double acting actuators
 - Low and high ambient temperature

Accessories

- > Remote mounting equipment



DT Electro-pneumatic version

Technical specifications

Housing material

Aluminum

Operating pressure

P min = 1.4 bar

P max = 7 bar

Design pressure = 10 bar

Static air consumption

0.036 Nm³/h (0.02 SCFM) at 400kPa (60 psi)

Feeding connection

ND 1/4"

Output connection

ND 1/4"

Pilot signal connection

1/2" NPTF

CV max

ND 1/4" Inlet = 0.12

ND 1/4" Outlet = 0.12

Operating temperature

-20°C / +70°C

Signal

4-20 mA

Sensitivity

0.1% of signal range

Repeatability

0.2% of the full stroke

Accuracy

0.5% of the full stroke

Hysteresis

0.5% of full stroke

Environmental humidity

5% - 95%RH


Input independence

375 Ω/20 mA

Weight

ND 1/4" = 2kg

Dimensional drawing

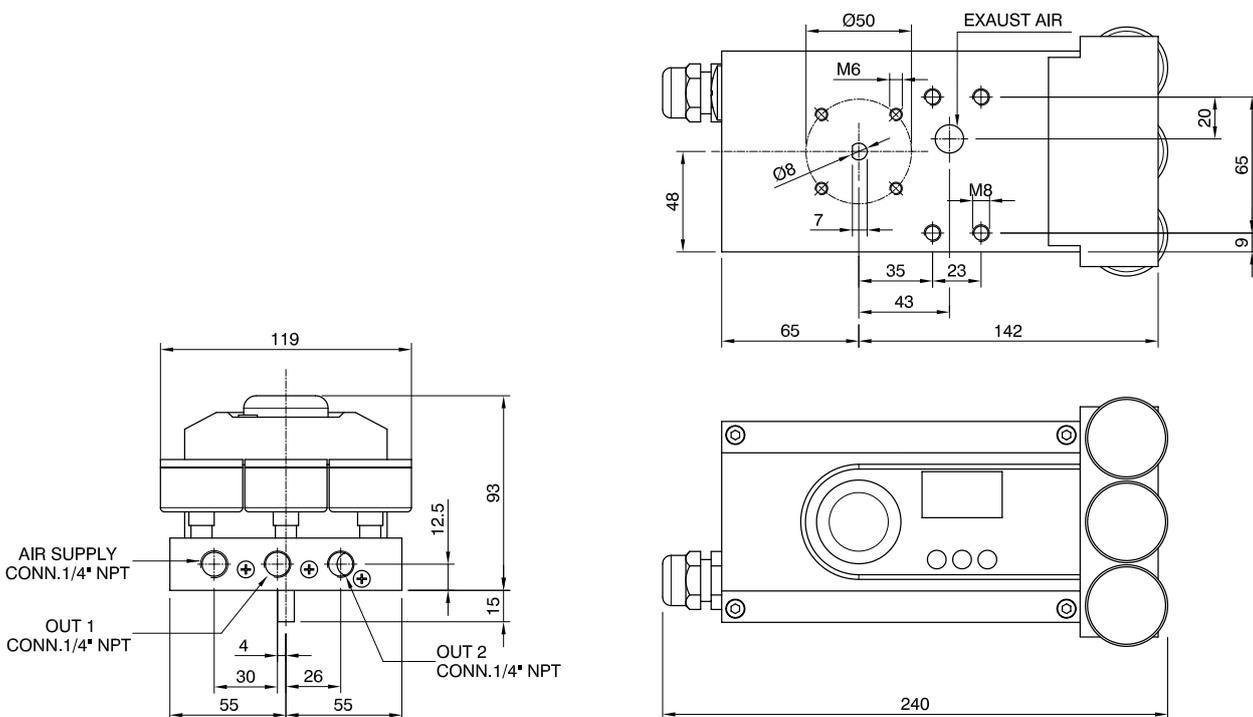

IMI STI - Headquarters

Via Dei Caravaggi 15
24040 Levate (BG)
Italy

Tel. +39 035 2928.2
Fax +39 035 2928.247

IMI STI - Quarter Turn Division

Via San Francesco 18
29017 Fiorenzuola d'Arda (PC)
Italy

Tel. +39 035 2928.2
Fax +39 0523 1715.295

IMI Critical Engineering

Lakeside, Solihull Parkway
Birmingham Business Park
Birmingham B37 7XZ
United Kingdom

Tel: +44 (0)121 717 3700
Fax: +44 (0)121 717 3701

www.imi-critical.com
imisti.sales@imi-critical.com

